



Absicherung bauseits
nach DIN EN 60204-1
Überstromschutz-
organ erforderlich!

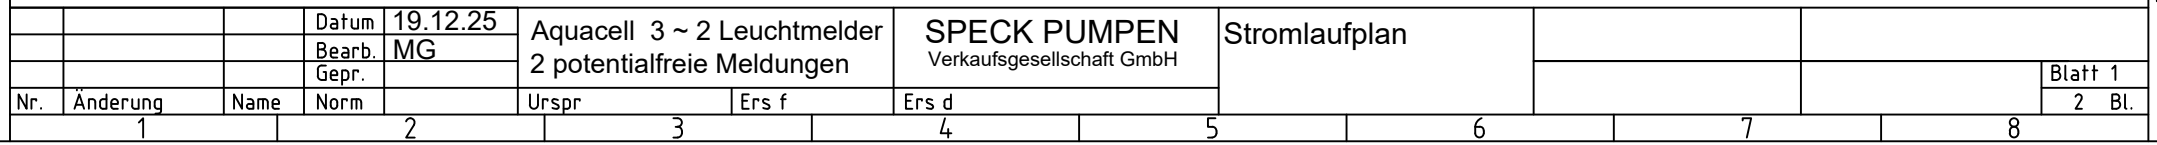

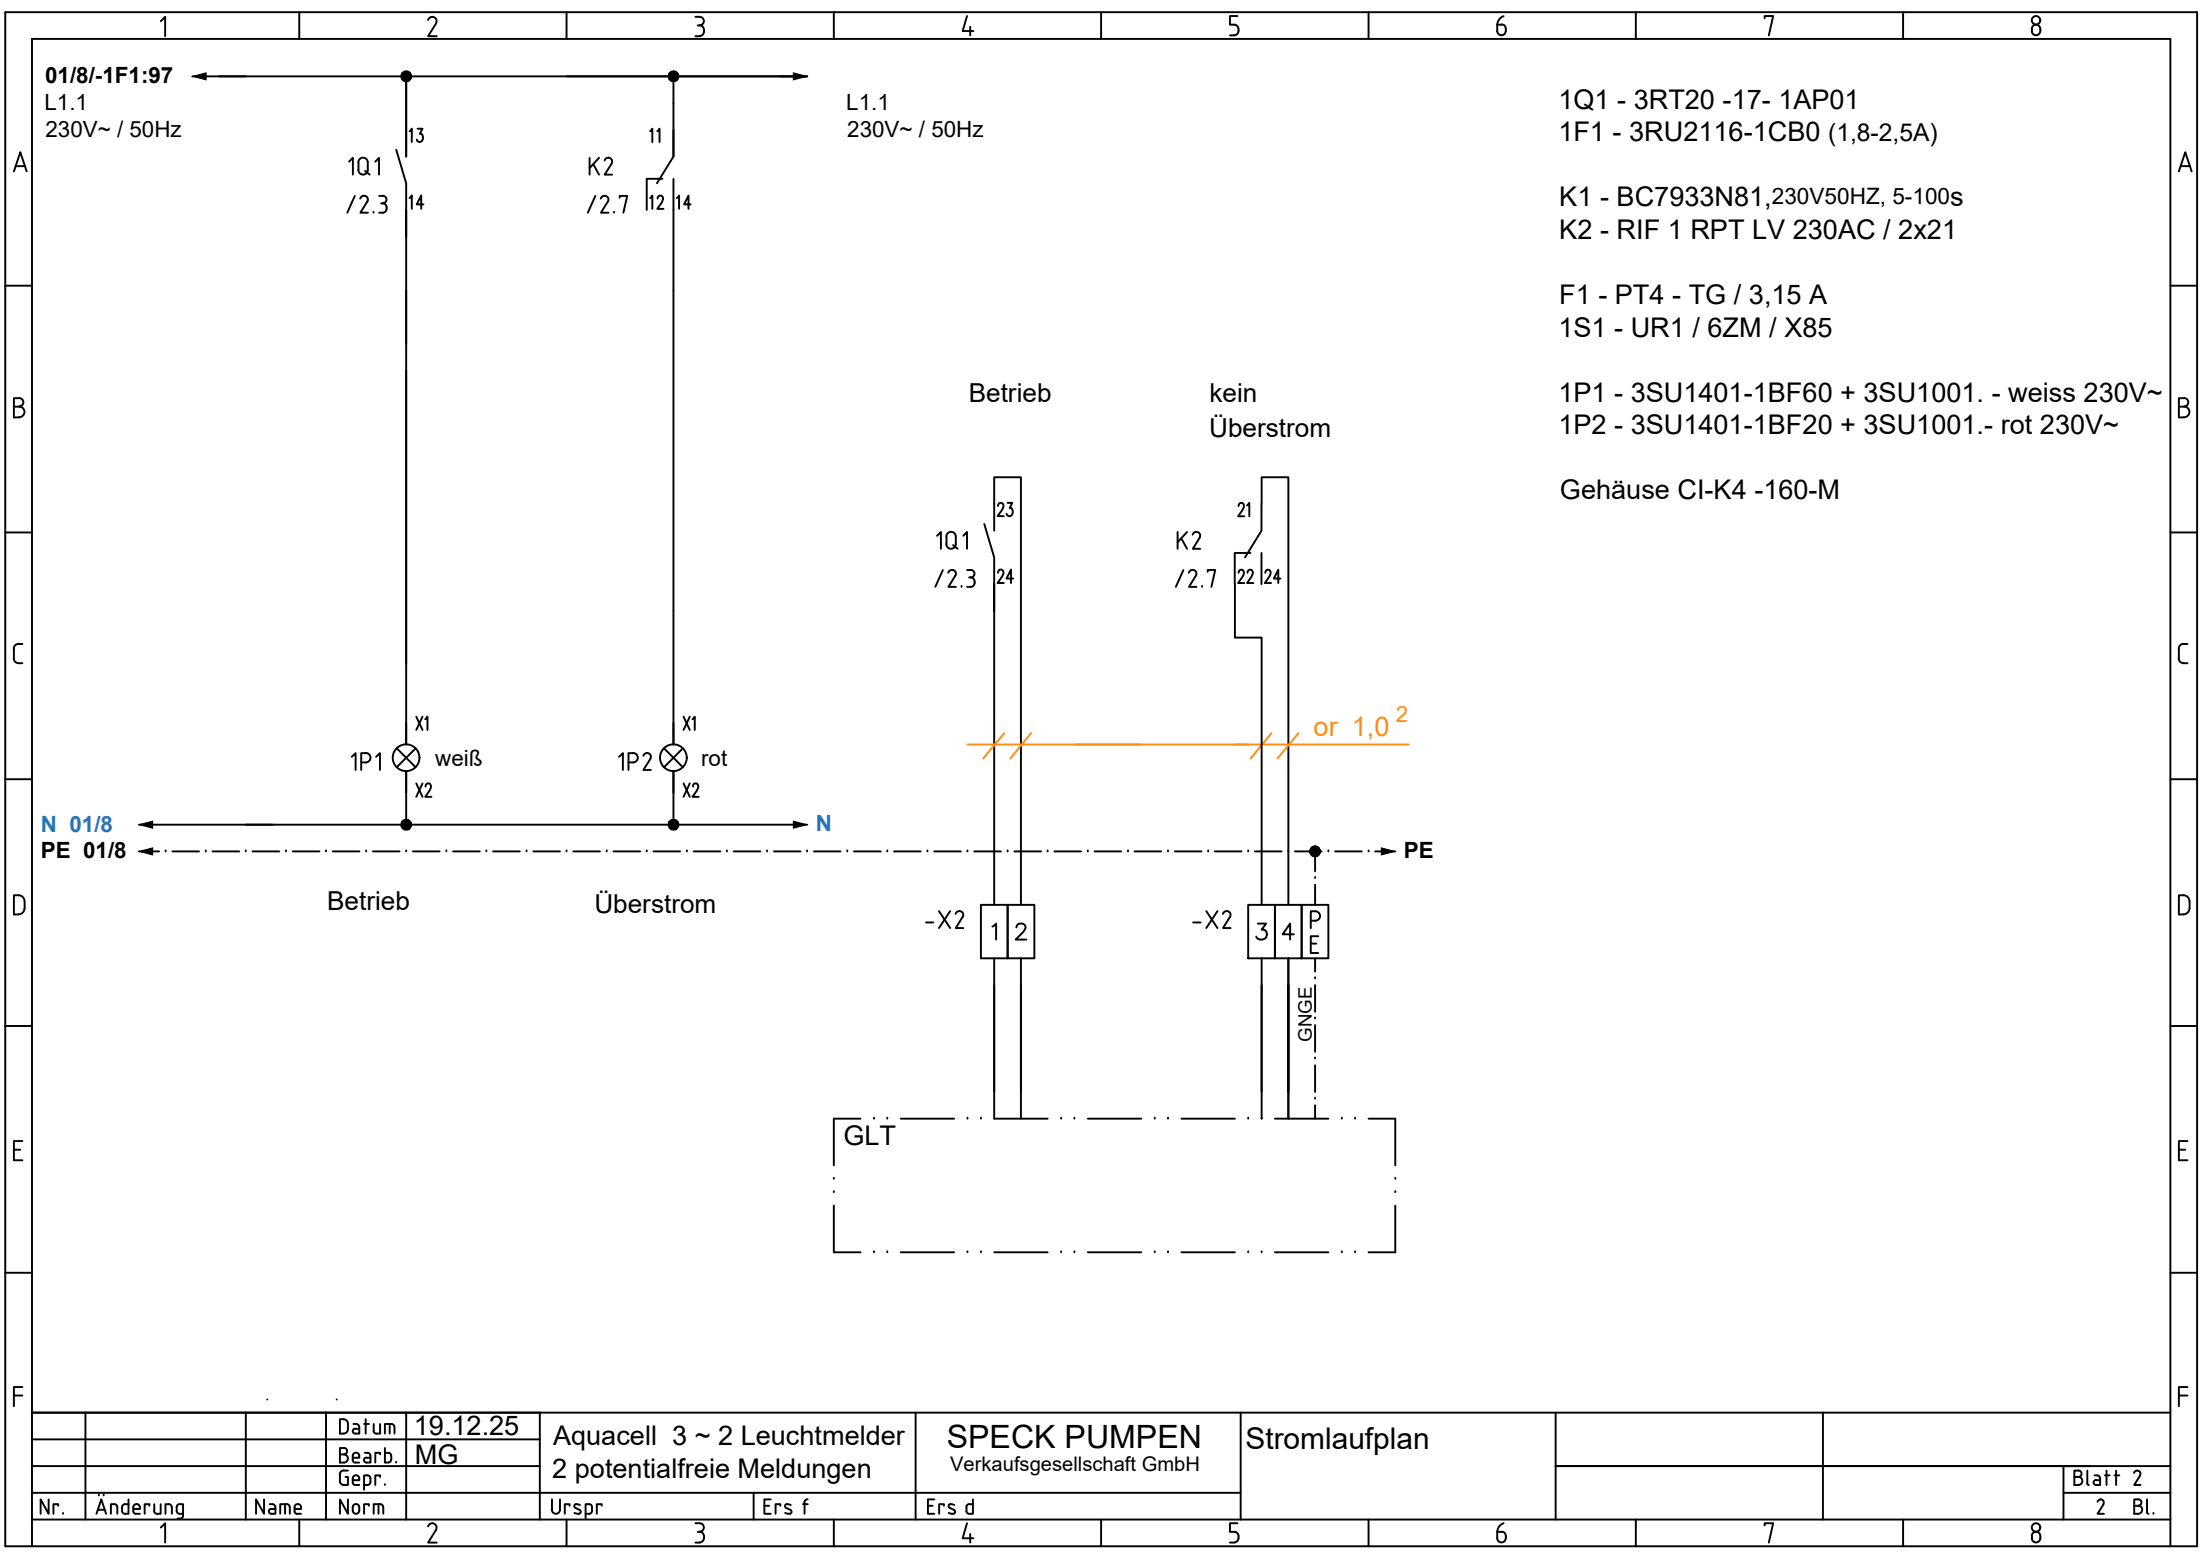

01/8/-1F1:97
L1.1
230V~ / 50Hz

L1.1
230V~ / 50Hz

1Q1 - 3RT20 -17- 1AP01
1F1 - 3RU2116-1CB0 (1,8-2,5A)

K1 - BC7933N81,230V50HZ, 5-100s
K2 - RIF 1 RPT LV 230AC / 2x21

F1 - PT4 - TG / 3,15 A
1S1 - UR1 / 6ZM / X85

1P1 - 3SU1401-1BF60 + 3SU1001. - weiss 230V~
1P2 - 3SU1401-1BF20 + 3SU1001.- rot 230V~

Gehäuse CI-K4 -160-M

N 01/8
PE 01/8

or 1,0²

GLT

			Datum	19.12.25	Aquacell 3 ~ 2 Leuchtmelder 2 potentialfreie Meldungen	SPECK PUMPEN Verkaufsgesellschaft GmbH	Stromlaufplan		
			Bearb.	MG					
			Gepr.						
Nr.	Änderung	Name	Norm		Urspr	Ers f	Ers d		
1			2		3		4	5	6
								7	8
								Blatt 2	
								2 Bl.	